


Polypropylene-steel flat \varnothing 4 mm



- GB** Rod made of flat steel covered with PP with interchangeable accessories M5.
- D** Flachstahl Einziehband mit PP Ummantelung, mit austauschbaren Endstücken M5.
- F** Tirefil avec âme plate en acier, revêtement en PP avec des terminaux interchangeable M5.
- E** Guía pasacable en fleje acero recubierto de PP con punta intercambiable M5.
- I** Sonda passacavo in acciaio piatto rivestito in PP con accessori intercambiabili M5.



WARNING! This is a tool only for professional use. Risk of electrical shock. For your safety **DO NOT USE** in ducts with voltage cables.
ATTENZIONE! Rischio di shock elettrico **NON USARE** in tubi con presenza di cavi in tensione elettrica.

Item	Length	
0419.10	10 m	5
0419.15	15 m	5
0419.20	20 m	5
0419.25	25 m	5

GB Accessories and spare parts

D Zubehör und Ersatzteile

F Accessoires et pièces de rechange

E Accesorios y piezas de repuestos

I Accessori e pezzi di ricambio



101050




101024


Polypropylene-steel wire \varnothing 4 mm



- GB** Steel wire draw-in tape covered with PP, with interchangeable accessories M5.
- D** Stahldraht mit PP Ummantelung, mit austauschbaren Endstücken M5.
- F** Tirefil avec âme flexible en fil d'acier revêtement en PP. Avec des terminaux interchangeables M5.
- E** Guía pasacable con núcleo de hilo de acero recubierto de PP con punta intercambiable M5.
- I** Passacavo in filo d'acciaio ricoperto in PP. Accessori intercambiabili M5.

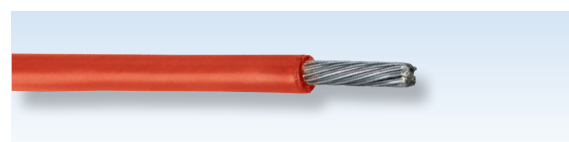

WARNING! This is a tool only for professional use. Risk of electrical shock. For your safety **DO NOT USE** in ducts with voltage cables.
ATTENZIONE! Rischio di shock elettrico **NON USARE** in tubi con presenza di cavi in tensione elettrica.

Item	Length	
4619.05	5 m	5
4619.10	10 m	5
4619.15	15 m	5
4619.20	20 m	5
4619.25	25 m	5
4619.30	30 m	5

GB Accessories and spare parts

D Zubehör und Ersatzteile

F Accessoires et pièces de rechange

E Accesorios y piezas de repuestos

I Accessori e pezzi di ricambio



101050



101024