

ARROW ROD SET®

GB Arrow Rod is the right professional Tool for Electricians in installations in floating floors, in false ceiling, in empty walls and where are not available cable ducts. Arrow Rod is in fiber glass Ø 6 mm and give the best flexibility and at the same time the best resistance. Arrow Rod Set will be essential in electrical installation. To facilitate using of the components, it comes in a flexible strong tube.

D Schubstange aus verstärktem Glasfaserverbundstoff. Es ist die Lösung für die Kabelverlegung Zwischendecken, Holzböden und Kabelkanäle.

F Tige de poussée en fibre de verre, c'est la solution pour l'installation de câbles dans les faux plafonds, planchers flottants et canalisés externe.

E Varilla de empuje en fibra de vidrio, Es la solución para la instalación de cables en falsos techos, tarimas flotantes y canales exteriores.

I Asta di spinta in fibra di vetro, la soluzione ideale per pavimenti galleggianti, pareti mobili e controsoffitti.

Item 4719.10.E Set composed by:


10 Pcs. Rod Ø 6 - 1m.

1 pc. Round flexible starting head

1 Pc. Pulling eyelet

1Pc. Pulling eyelet with ring

4719.10.E

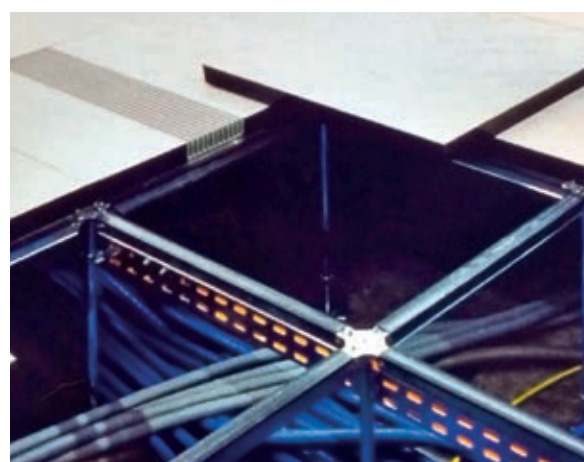

GB Special accessories and spare parts

D Sonder-Zubehör und Ersatzteile

F Accessoires spéciaux et pièces de rechange

E Accesorios especiales y piezas de repuestos

I Accessori speciali e pezzi di ricambio

101050

GB Flexible starting spinner M5.

D Flexible Federführungskopf mit Zugöse M5.

F Tête flexible avec œillet M5.

E Punta flexible con ojal de tiro M5.

I Puntale flessibile con asola M5.

101024

GB Pulling eyelet M5.

D Kopf mit Zugöse M5.

F Embout avec œillet M5.

E Punta ojal M5.

I Tirante con asola M5.

4719.PE

GB Pulling eyelet with ring.

D Führungskopf mit Öse und Ring.

F Ogive initiale avec bague.

E Cabeza guía con grillete de enganche.

I Ogiva iniziale con anello.



101050



101024



4719.PE

CLZ

GB Cable pulling grip.

D Kabelziehstrumpf.

F Chauette tracteurs.

E Malla tiracables.

I Calze tirafili.

Item	Ø	L	Brake Load
CLZ4-6	4-6 mm	200 mm	215 kg
CLZ6-9	6-9 mm	210 mm	215 kg
CLZ9-12	9-12 mm	350 mm	450 kg
CLZ12-15	12-15 mm	350 mm	450 kg
CLZ15-19	15-19 mm	350 mm	1300 kg
CLZ19-25	19-25 mm	400 mm	1300 kg
CLZ25-31	25-31 mm	400 mm	1700 kg



CLZ